## FITTING INSTRUCTIONS

Patent No. 0001477.9.

www.hogarthfineart.com



## THE HOGARTH PICTURE LIGHT PERFORMS BEST WHEN ATTACHED TO THE FRAME

WARNING - DO NOT CONNECT LIGHT WITHOUT THE TRANSFORMER - DRIVER

NEVER LOOK DIRECTLY AT THE LED BULB AS THIS CAN DAMAGE YOUR EYE SIGHT

Attach the brackets to frame or wall - Push the red connectors onto the end of the arms ensure Positive and negative are correct - DO NOT TOUCH THE LEDs as this will reduce life

DIMMABLE Do not fit to a dimmer switch

Follow the appropriate national wiringregulations. Lights should be installed by a qualified electrician. The light should be connected to the lightingcircuit, or fused at a maximum of 3AMPS.


Live (L) - Brown or Red. Neutral (N) - Blue or Black.


Disconnect from the mains supply before installation, changing the bulb, maintenance.

Cleaning. Disconnect from Mains supply. Allow to cool down.

We accept no responsibility for modified lights, affects of cleaning or the accumulation of dust.

## From transformer to the light the Positive cable has the black stripe

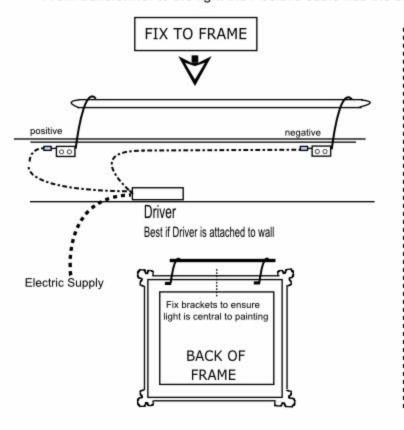

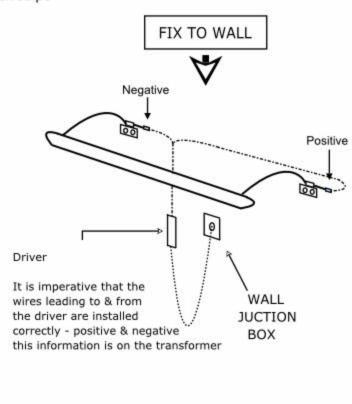

Tighten grub screw on bracket with key to hold arm in desired position
Only move the arm with the screws loose to prevent a groove being made in
the copper or the screws will not hold

